
For Sparton Radio Dealers

Number 5-A

Adjust Aerial and Equalizing Condensers in Accordance with the Following Information

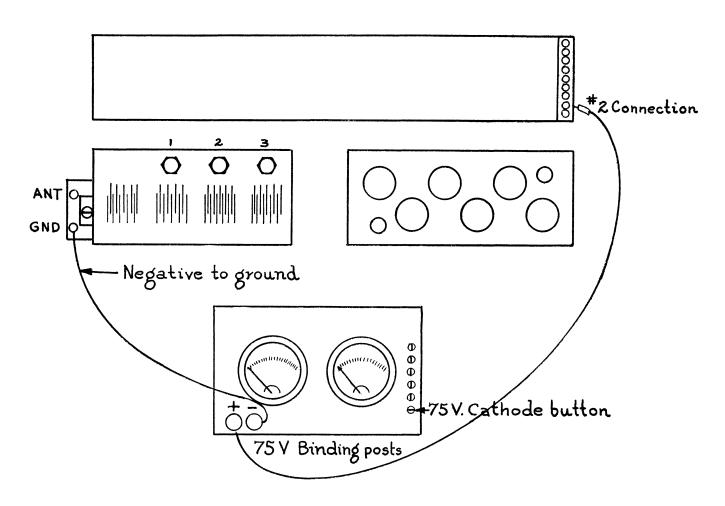

After making connections as shown, tune in a station at 1,000 kilocycles or above and with volume control on full, press and lock 75-volt cathode button. Turn antenna condenser screw to right or left for highest reading on meter. Then trim equalizing condenser with special wrench supplied by The Sparks-Withington Company starting with number three condenser turning same to right or left for the highest meter reading. Then trim number one and two condensers respectively.

Special Note: When making these adjustments, use about ten feet of antenna wire if local station is used and regular antenna if distant station is used.